


0.9mm SX 9/125 Yellow TIGHT BUFFER FIBER

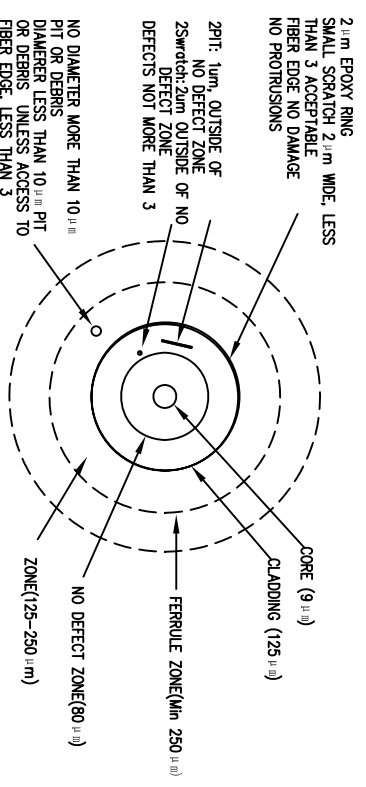


(SM) FIBER END-FACE STANDARD

SPECIFICATIONS:

Type	Multi-Mode	Single Mode
Insertion Loss	≤ 0.5dB	≤ 0.2dB
Return Loss	≥ 20dB	≥ 55dB
Test Wavelength	850nm	1310nm

LENGTH TOLERANCE:

LENGTH (L)	TOLERANCE
< 1M	+50mm/-0
≥ 1M < 10M	+100mm/-0
≥ 10M < 30M	+150mm/-0
≥ 30M	+1%/-0



Tolerances unless otherwise specified:

Designed By	chenhu	2015.02.04
Checked By		
Approved By		

DESC. 9ST1

DRG. No. H01-00ST-002

Scale

Version 1.0

sheet 1 of 1